

MS SERIES - FLAT HEAD TYPE MINI SCHIFFLI EMBROIDERY SEWING MACHINE

"Seeing is Believing"

PREMIUM BRAND
PREMIUM TECHNOLOGY











HIGH-END MODEL MAKING THE MOST USE OF AURA'S TECHNOLOGIES

High-grade machine having Extended Functionality and Superior Performance



.... Unlimited Opportunities

Multi-head Automatic Embroidery Machines

CORPORATE OFFICE





INDIA'S MOST TRUSTED EMBROIDERY MACHINES BRAND




We take this opportunity to explain the fantastic innovations of our Aura Embroidery Machines.

The Aura machines have the capability to perform all types of embroidery including, Taping, Cording, Beading, Cut Dana, Frilling, Coiling, Thick Thread embroidery, and of course Normal Embroidery. Aura machines can multi-task by using various combinations of attachments to create an endless range of designs styles.

OPTIONAL DEVICES & ATTACHMENTS

NOTE: - MACHINES CAN BE MADE AS PER CUSTOMER CUSTOMISED SPECIFICATIONS

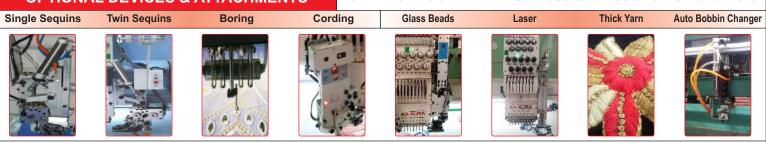

Standard Head & Sequin Device Combination

Our new Twin Type Sequin Device, where the two sequins are attached using a single needle and by a single thread. Sequins can be overlapped, laid on top of each other or laid alternatively into the most complex range of designs!!

Standard Head, Sequin Device & Boring Device Combination

The normal head can perform standard embroidery with Boring and & Sequins to create the most wonderful embroidery.

Our latest Beading Device, which allows you to attach multi-colored beads creating a fantastic range of endless designs that truly no other manufacturer can come even close to achieving.

Our range of models are perfect for Garments, Complex Saree Borders, Home Furnishing, Children's Clothing, Curtains & Cushion Covers, and the list goes on according to the users own creativity.

Many of Known Exporters and Job workers are using Our Aura brand Embroidery Machine



OTHER EQUIPMENTS



Simple handle & operate.

it is can automatically trim and send the bobbin once finished winding thread Automatic Bobbin Winder lets you control the amount of thread being wound which permits better production plans.

it can use for Both Machines Improve the production efficiency sewing machine and embroidery machine best assistant equipment.



SCALLOP CUTTING MACHINE

Easy to handle & operate. Suitable for small & Big scale cutting Suitable for gentle curve line cutting

To cut the larger part of the garments.

With a same r.p.m. its efficiency is 10 times greater than the straight knife. t's useful for gentle curve line cutting, big parts cutting, lace cutting, cutting out fabric block from lay & small scale cutting.

It's normally use for small production.

AUTOMATIC BOBBIN WINDER ROBOT

save labor cost

uniform bobbin winding

uniform meterage & thread tension

lower quality rejections

increase productivity

up to 180 bobbins per hour

Upgraded Cordless Powerful Stitch Eraser

-- Embroidery Mistake Removal Tool





STITCH ERASER

The Original Stitch and Embroidery Removal Tool AEE-0118 Embroidery and Stitch Eraser is a utility device for every Garment manufacturer and Embroiderer which has been launched first time in India. It is used to easily Open Defective Embroidery and Stitches for Mending. It is used to remove stitches from embroidery and all types of stitch patterns.

<u>Description</u> Power Adapter: AC-100-240V, DC 5V, 1A, 50/60Hz Charging Time: 4 Hours

Operation Time: up to 7 Hours

Battery Type: Lithium Rechargeable Battery

Battery Capacity: 3.7V, 2000mA, 7.5W

Blade: Tungsten-Steel coating on Ceramic Shear Blade (Detachable 40mm blade)



EASY THREAD CUTTER IS WORTHY FOR ALL THE GARMENT EXPORTER'S

ROBUST TECHNOLOGY INCREASE EFFICIENCY EASY TO CLEAN AND CARRY

LOWEST COST & MAINTENANCE SAVE TIME & SAVE MONEY **ENVIRONMENTAL FRIENDLY HEALTH SAFETY CONSIDER**

THE SINGLE MACHINE CAN SAVE TWO MANPOWER COST



MACHINE SPECIFICATIONS

						MA	<u> </u>	AL OI	<u>LC</u>	ш	<u>CA</u>		<u>///3</u>						
HSCX-II SERIES											HSCX-4.0								
MODEL	HEAD	COLORS	AREA X	AREA Y	OPTIONAL DEVICES & ATTACHMENTS			MODEL	HEAD	COLORS	RS AREA X AREA Y		OPTIONAL DEVICES & ATTACHMENTS						
2+2	2+2	4/6/9	400~850	750~1750	Single Sequins	Twin Sequins	Boring	Cording	2+2	2+2	4/6/9	400~850	750~1750	Single Sequins	Twin Sequins	Boring	Cording		
4+4	4+4	4/6/9	400~850	750~1750	A Car	And the second	THE RESERVE THE	MARI	4+4	4+4	4/6/9	400~850	750~1750	A Car	A COLUMN	THE PERSON NAMED IN	Myon		
6+6	6+6	4/6/9	400~850	750~1750			A BARRIOT	1 . 0	6+6	6+6	4/6/9	400~850	750~1750				1		
12+12	12+12	4/6/9	400~850	750~1750	与		00,00	1	12+12 15+15	12+12 15+15	4/6/9 4/6/9	400~850 400~850	750~1750 750~1750	与		00,00	- Same		
15+15 18+18	15+15 18+18	4/6/9 4/6/9	400~850 400~850	750~1750 750~1750	1			1	18+18	18+18	4/6/9	400~850	750~1750				1		
19+19	19+19	4/6/9	400~850	750~1750	145			1	19+19	19+19	4/6/9	400~850	750~1750			0 0	1		
31+31	31+31	3/4	250	750~1750	Glass Beads	Laser	Thick Yarn	Auto Bobbin Changer	31+31	31+31	3/4	250	750~1750	Glass Beads	Laser	Thick Yarn	1N4S (Quad Color Sequins)		
32+32	31+31	3/4	250	750~1750	AND DESCRIPTION OF THE PARTY OF	(MARCO)			32+32	31+31	3/4	250	750~1750	Trends and a	geoco	4.4	Sequins)		
35+35	35+35	3/4	250	750~1750		0000		Tel Street	35+35	35+35	3/4	250	750~1750		0000				
					COLON	2511170		K -						William Will	1/3/11/(A)	图 機 。	10000		
					MINIM TON	A									1710				
					SATER OF SE									SARTINA OF SAR					
					0100									THO:			-2.00		
	NOTE:-				MADE AS PER	DE AS PER CUSTOMER CUSTOMISED SPECIFICATIONS				NOTE:-				MADE AS PER		CUSTOMER CUSTOMISED SPECIFICATIONS			
CDECIFICATIONS			-	LENGTH:-		0.1 TO 12.7 mm				SPECIFICATIONS:-			STITCH LENGTH:- MEMORY CAPACITY:- POWER SOURCE:-		0.1 TO 12.7 mm				
SPECI	SPECIFICATIONS:-			CAPACITY:- Source:-	-	10 MILLION STITCHES / USB INPUT									10 MILLION STITCHES / USB INPUT				
			POWERS		MO MD OF	3 PHASE 220V/380V (50Hz/60Hz)							POWER SOURCE:-		3 PHASE 220V/380V (50Hz/60Hz)				
MODEL	UEAD	001.000	ABEAV		MS-MB SE									LEO-4.0					
MODEL RANGE=	HEAD	3 to 12	AREA X 165~800	AREA Y	Single Sequins	ONAL DEVICES & Twin Sequins	Boring	Cording	MODEL	HEAD	3 to 12	165~800	AREA Y 500~1500	Single Sequins	IONAL DEVICES & Twin/Four Sequins		Cording		
902	2	9	400~800	750~1500	Single Sequilis	Twin Sequins	Ботпід	Cording	902	2	9	400~800	750~1500	Single Sequins	Twin/rour sequins	Boring	Cording		
904	4	9	400~800	750~1500	A VIII		and a should	1	904	4	9	400~800	750~1500			and a should	1		
906	6	9	400~800	750~1500			00,00		906	6	9	400~800	750~1500						
912	12	9	400~800	750~1500					912	12	9	400~800	750~1500			00 00			
915	15	9	400~600	750~1500					915	15	9	400~800	750~1500		200	200			
918	18	9	400~-500	750~1500					918	18	9	400~-800	750~1500				100		
920	20	9	400	750~1500	Glass Beads	Laser	Thick Yarn	Auto Bobbin Changer	920	20	9	400	750~1500	Glass Beads	Laser	Thick Yarn	1N4S(QUAD COLOR SEQUINS)		
924	24	9	400	750~1500	1833000388	00000	A	7	924	24	9	400	750~1500	STREET, TO	00000		- MA		
636	36	6	200	750~1500	SECULIA TO	2000	584	1	636	36	6	200	750~1500		*****	and the	A STATE OF THE PARTY OF THE PAR		
648 656	48 56	6	200 165	750~1500 750~1500					648 656	48 56	6	200 165	750~1500 750~1500		STANK P		17		
000	- 36	0	100	750~1500					000	30	0	100	750~1500		S27978 1 A				
					aming a	200								annin 🌌			Jay		
	NOTE:-			NES CAN BE	MADE AS PER	MADE AS PER CUSTOMER CUSTOMISED SPECIFICATIONS				NOTE:-			MACHINES CAN BE		E AS PER CUSTOMER CUSTOMISED SPECIFICATION		PECIFICATIONS		
	SPECIFICATIONS:-			LENGTH:-	T	0.1 TO 12.7 mm				NOTE.			STITCH LENGTH:-		0.1 TO 12.7 mm				
SPEC				Y CAPACITY:	10 MILLION STITCHES / USB INPUT				SPECIFICATIONS:-			POWER SOURCE:-			10 MILLION STITCHES				
				SOURCE:-	3 PHASE 220V/380V (50Hz/60Hz)			3 PHASE 220V/380V (50Hz/60Hz) (SINGLE PHASE AVAILABLE ON REQUEST)											
					LEO-III			,					RAFTAF	R (LEO) :	SERIES				
MODEL	HEAD	COLORS	AREA X	AREA Y	OPTIO	NAL DEVICES & A	ATTACHMENTS		MODE	L HE	AD C	OLORS	AREA X	AREA		TIONAL DE	VICES		
Range =	====>>>	3 to 12	165~800	500~1500	Single Sequins 1	Twin/Four Sequins	Boring	Cording	902	2		9	400~600		Ocqui	a Color ns)	Thick Yarn		
902	2	9	400~800	750~1500	OV B			Wine II	904	4		9	400~600			-			
904	4	9	400~800	750~1500	1		ALT SALE		906	(9	400~600 400~550	750~130	The state of the s				
906	6	9	400~800	750~1500	与		00 ,00	7	912 915	1		9	400~550	750~130 750~130	117	3			
912	12	9	400~800	750~1500				1	915	1		9	400	750~130	4				
915 918	15 18	9	400~800 400~-800	750~1500 750~1500	A Description	7	0000	1000	310	'			400	730 130					
920	20	9	400~-600	750~1500	Glass Beads	Laser	Thick Yarn	1N4S (QUAD COLOR							Borir	ng	Cording		
924	24	9	400	750~1500	Cidoo Beddo	- Lucio	THICK TUIT	SEQUINS)									M. AAVOE III		
636	36	6	200	750~1500											Edd a				
648	48	6	200	750~1500															
656	56	6	165	750~1500											000	-	4 30		
					A 1 1 1 1 1			M								0.0	Y		
					TO INC.	****		404							0.25		Control of the Contro		
NOTE:- SPECIFICATIONS:-			MACHINES CAN BE MADE AS PER CUSTOMER CUSTOMISED SPECIFICATIONS							OTE:- MACHINES CAN BE MADE AS PER CUSTOMER CUSTOMISED SPEC					ECIFICATIONS				
			STITCH LENGTH:- 0.1 TO 12.7 mm							LENGTH			0.1 TO 12.7 mm						
				CAPACITY:-		10 MILLION STITCHES 3 PHASE 220V/380V (50Hz/60Hz) (SINGLE PHASE AVAILABLE ON REQUEST)				MEMORY CAPACITY:-			10 MILLION STITCHES / USB INPUT						
				SOURCE:-					POWER SOURCE:-			3 PHASE 220V/380V (50Hz/60Hz) (SINGLE PHASE AVAILABLE ON REQUEST							
		101	n't C							AAADT									

ON'TIMES I OTA SMART FACTORY QURANETWORK MANAGEMENT SYSTEM FOR MACHINE FLOOR



